# Project Design Document: Greening of rural value chains for dal mill and pulp processing unit


# Project background

Bhagyatara Farmers Producer Company Limited is a 351-member farmer-producer organisation (FPO) incorporated in 2017. The details of FPO are mentioned below.

Table 1 Details of FPO

Name of FPO	Bhagyatara Farmers Producer Company Limited		
Address	At Sakuri, Rahata District: Ahmednagar, Maharashtra, India -		
	423107.		
Activity	Trading of agricultural produce		
Propose activity	Dal mill, Pulp Processing unit, Blast freezer, and cold storage		
Capacity of unit	3 TPH, 1 TPH, 3 MT and 120 MT respectively		
Produce	All grains, custard apple, guava, mango		
Number of operational days	280		
Connected load (kW)	64		

The raw material is sourced from the member and non-member farmers of FPO in the region. The value chain is as follows:

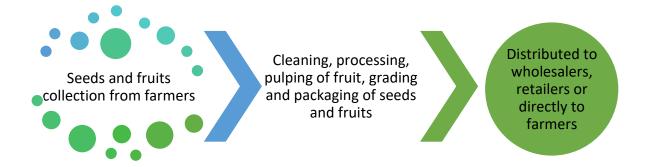

However, the processing unit will face challenges of high operation costs, a major component of which is electricity cost. This issue will result in low profitability of the unit.

## **Project description**

This project aims at the solarisation of unit by installing solar PV. The specifications of the proposed solar PV system and annual savings are as follows,

Table 2 Details of solar PV system

Solar photovoltaic panel system	105.28 kW
Annual mitigation of CO <sub>2</sub>	121.42-ton CO₂ per year
Average savings on annual electricity unit consumption	153702 units
Average saving on annual electricity bill	INR 1960174

<sup>\*</sup>Assumption:

<sup>1.</sup> Saving per unit electricity consumption INR 10 per KWh

<sup>2.</sup> Average power generation per KWp= 4 kWh/KWp/day

# Summary of investments

Total project cost is expected to be close to INR 57.90 lakhs that includes design, engineering, procurement, and installation. Per kW cost of solar PV is considered 50,000 Rs/kW with EE measures of INR 5000 per kW is considered.

**Sharing Technology** Un **Capacit** Qty Cost Value **Cost sharing** Relevan (Rs/unit (Nos (Rs.) scheme FPO Loan Govt subsid equity У 1 Project Cost\* 105.28 52,63,7 1 52,63,7 10,52, 0 42,11, Solar k W photovoltaic 76 76 021 755 panel system with battery 1 5,26,37 5,26,37 1,05,2 4,21,1 Energyefficient 8 76 02 measures Total 57,90,1 57,90,1 11,58, 0 46,32, 20::0::8 123 031

Table 3 Capital Costs for the project

#### Financial analysis

A simple cash-flow analysis is below, with the conservative assumption that the equipment has a lifespan of 20 years.

### Project cost

The project cost of 57.90 lakh includes solar panel equipment cost and installation cost, other components of project cost are taken as zero as the plant is already proposed.

#### Means of finance

Regarding the implementation of solar rooftop installations for industrial consumers, no subsidies are accessible for this initiative. Consequently, the funding for the project will be undertaken by the FPO. The financial arrangement for this venture entails a 20% equity investment from the FPO and the remaining 80% through a loan arrangement. Additional specifics concerning the financing breakdown can be referenced in Table 5.

Table 4 Means of Financing

Means of Finance				
Total Financing required	INR lakhs	57.90		
Equity	%	20%		

<sup>\*</sup>Project cost includes all costs (plant and machinery, solar photovoltaic panel costs, et al), excluding land cost

<sup>\*\*</sup>Based on discussions held on the ground and their financial conditions, equity share ranges from 5% to 30%, hence has been assumed at 20%

Grant	%	0%
Debt	%	80%
Interest Rate (Per Annum)	%	12.00%
Moratorium	Years	1
Annual Instalment	Years	5
<b>Equity Component</b>	INR lakhs	11,58,031
<b>Grant Component</b>	INR lakhs	0
Debt Component	INR lakhs	46,32,123

Source: MP Ensystems Research

The financial indicators analysed by discounting cash flow at 10% and the summary is presented in **Table 5**.

Table 5 Estimated Financial Indicators

Financial Indicators	Estimated	Requirement
Net Present Worth	85.09	Should be positive
IRR	39%	> 10%
BCR	2.8	Should be >1.0
Payback period	5.1 years	

Source: MP Ensystems Research

The bank loan with interest is repayable within 5 years with a moratorium of one year.

The following specific attributes of ESG can further be achieved through the implementation of this project:

• There are a number of environmental opportunities including mitigation of carbon emissions, reduction of resource depletion. There are direct climate benefits to the project. The installation of roof-top solar results in the mitigation of 121.42 tonnes of CO<sub>2</sub> emissions every year.